



Remove door from hinges by removing hinge pins. Remove damaged door bottom and clean surface.

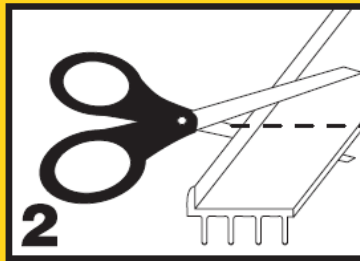

Measure width of door and cut door bottom to length with scissors.

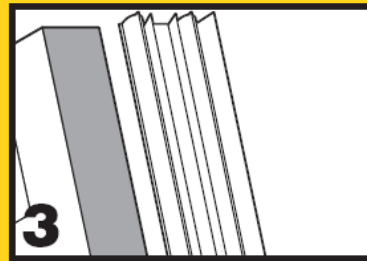

Install door bottom with drip fin to the outside. Attach to bottom of door with screws or nails between the vinyl fins. Replace door onto hinges. Insert hinge pins.

- 1** Remueva la puerta de las bisagras quitando las clavijas. Remueva la base para puerta dañada y limpie la superficie.
- 2** Mida el ancho de la puerta y corte la base para puerta con tijeras.
- 3** Instale la base para puerta con la aleta de goteo hacia afuera. Fijelo en el canto inferior de la puerta con tornillos o clavos entre las aletas de vinilo. Cuelgue la puerta en las bisagras y instále los pasadores.